

رؤية
VISION 2030
المملكة العربية السعودية
KINGDOM OF SAUDI ARABIA



Fire Cabinet SF600 Series

Cabinet Details

SFFECO Cabinets are manufactured from Mild Steel or Stainless Steel material with a thickness of 0.9mm to 2.0mm which depends on usage or customer request.

Backbox, Door and Frame can be of different thickness and material.

The cabinets are available with all around folded edges without any sharp edges.

Optional Hairline or Mirror finish Stainless Steel cabinets are also available.

Cabinets are painted with Powder Coated for elegant finish and protection from rust.

Operation Instructions are silk screen printed in Arabic and English languages inside the cabinet.

Hose Reels in cabinets are fully equipped with landing valves and nozzles.

Cabinets are available in different size and design to meet architectural requirements.



موديل اس اف ٦٠٠
Model: SF600

Two door steel cabinets, one is equipped with hose reel and the other for optional fire extinguisher

Rubber Hose of 30 meter available in manual or automatic models

Available in different sizes and design to meet architectural requirements

صندوق حريق مصنع من الصاج ، بجزئين افقيين ، أحدهما تستخدم لتزويد خرطوم الحريق من النوع المطاطي يقطر بوصة طول ٣٠ متر مع جميع ملحقاتها. وهي: محبس ، وقاذف ، وبكرة مع حامل البكرة ، وخرطوم الحريق. والحجرة الاضري تستخدم لوضع طفاية حريق اختيارية ، من نوع البودرة الجافة.

ويتوفر هذا الموديل بنوعين العادي والاوتوماتيكي.



موديل اس اف ٦٠٠ اس
Model: SF600S

Similar to SF600 but in Stainless Steel #304


(Other Stainless Steel types are available upon request.)

Cabinets in stainless steel are available with hairline or mirror finish as per customer request.

صندوق حريق مصنوع من الستانلس ستيل بجزئين افقيين ، احدهما تستخدم لتزويد خرطوم الحريق من النوع المطاطي بقياس بوصة طول ٣٠ متر ، مع جميع ملحقاتها. وهي: محبس ، وقاذف ، وبكرة مع حامل البكرة ، وخرطوم الحريق. والحجرة الأضري تستخدم لوضع طفاية حريق اختيارية ، من نوع بودرة جافة.

يتوفر هذا الموديل بنوعين من الاستينلس ستيل ، النوع المحرز (Hairline Finish) أو النوع المصقول (Mirror Finish) ويتم ذلك حسب الطلب.

ويتوفر أيضاً هذا الموديل بنوعين العادي والاوتوماتيكي.

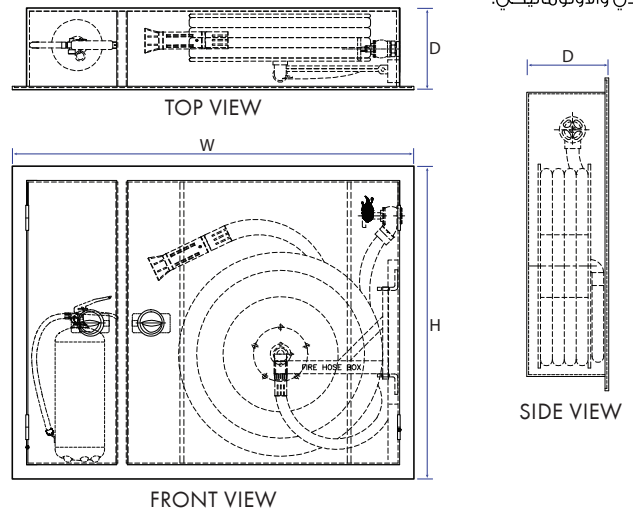

MODEL	WIDTH (W)	HEIGHT (H)	DEPTH (D)
SF600	1050	800	230
SF600S	1050	800	230
SF600A	1050	800	250
SF600AS	1050	800	250

All dimensions are in mm.

بنود اختيارية : بطانية حريق ، أو فأس حريق يمكن وضعه بدلا عن طفاية الحريق. طفاية الحريق تباع منفصلة.

Note: Fire Blanket or Fire Axe can be fitted in place of Extinguisher. **Extinguisher sold separately.**

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Fire Hose Reel



بكرة خرطوم الحريق المتأرجحة موديل اس اف ٣٠

تقوم سفيكو بتصنيع بكرة الحريق مع الخرطوم في موديلين العادي اس اف ٣٠ والأتوماتيكي اس اف ٣٠ مزودة بخرطوم مطاطي قياس ابوصة أو ٣/٤ بوصة الخرطوم عادة من اللون الاحمر الا انه يمكن توفير خرطوم من اللون الاسود عند الطلب

وحسب تعليمات الدفاع المدني فإن هذا النوع يستخدم في جميع القطاعات لسهولة استخدامه حيث لا يحتاج الى فريق متدرب ويكفي شخص واحد للتشغيل

Hose reel discs are painted with electrostatic powder coating and oven baked at 180°C to 200°C.

Hose reel drum has formation of hydraulically pressed ribs to give extra strength and to avoid twisting. The outer edges are rolled over to give a safe handling edge on the outer rims and better appearance.

Automatic fire hose reels are available with an internal valve built into the hose reel unit which opens within 3 revolutions of the hose reel as the hose is pulled out and closes when the hose is wound back to the reel.

Hose can be semi rigid made of rubber in red color and optional BS EN694 with two synthetic rubber layers and textile reinforcement. Standard hose size is 25mm.

EN671 Approved hose reels are available upon request.

Model:

- SF/30 (Manual)
- SF/30A (Automatic)

Approval:

- Standard
- EN671 Approved

Other Accessories (Valves & Nozzles)



Nozzle - Model C: (Brass & Chrome Plated)

Brass & Chrome Plated without handle for 3 way control.
(Jet - Spray - Shut off)



Landing Valve:

- 1"
- 1.5"
- 2.5"

Body is Chrome plated and Hand wheel with Steel, Epoxy coated, WP: 16 bar.



Angle Valve:

- 1.5"

1.5" Angle Valve
UL/FM (Optional)

Plastic Nozzle

Model A: *



Plastic Nozzle with 3 way control.
(Jet - Spray - Shut off)

Valve and Nipple: *



- 1"

Valve or Nipple shall be of 1" ball valve and body made of brass



Pressure Restricting Angle Valve:


- 1.5"

UL/FM (Optional)

* EN 671 Approved Hose Reels are provided with Plastic Nozzle (Model A) and 1" Ball Valve & Nipple.

SFFECO Fire Cabinets

Cabinet Design and Finish



Left hand


Right hand

DOOR OPENING TYPE

Flat Trim cabinet

Curved Trim cabinet

TRIM

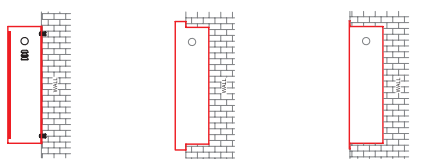


Surface

Semi-Recessed

Recessed

MOUNTING TYPE

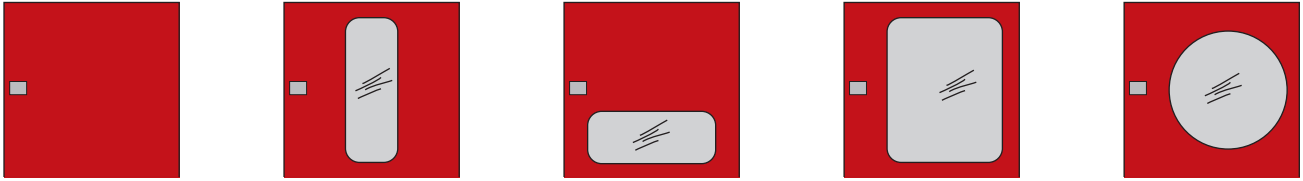

Standard (S)


Vertical (V)

Horizontal (H)

Full (G)

Circle (C)

DOOR SELECTION

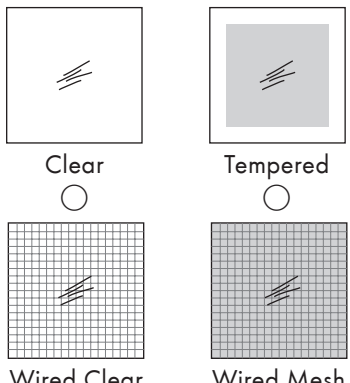

Clear

Tempered

Wired Clear

Wired Mesh

GLASS SELECTION

Door, Frame & Backbox in Stainless Steel (Full Stainless Steel)

Hairline Finish Mirror Finish

Door, Frame & Backbox in Mild Steel (Full Mild Steel)

Red Color _____

Backbox in Mild Steel

Red Color _____

Door & Frame in Stainless Steel

Hairline Finish Mirror Finish

CABINET MATERIAL & FINISH

Note:

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

شركة المصنع السعودي لأجهزة الإطفاء SAUDI FACTORY FOR FIRE EQUIPMENT Co.

FACTORY & HEAD OFFICE - RIYADH

2nd Industrial Area
Al-Kharj Road, Riyadh, KSA,
P.O. Box: 58469, Riyadh 11515
Tel: +966 11 2650070,
E-mail: riyadh@sffeco.com.sa

SFFECO GLOBAL - DUBAI

P.O. Box: 261318
JAFZA South, Dubai U.A.E.
Tel: +971 4 880 9890,
E-mail: sales@sffecoglobal.com

JEDDAH BRANCH

P.O. Box: 16769, Jeddah – 21474, KSA
Tel: +966 12 670 6009
E-mail: jeddah@sffeco.com.sa

DAMMAM BRANCH

P.O. Box: 7162, Dammam – 31462, KSA
Tel: +966 13 8351961
E-mail: dammam@sffeco.com.sa

MADINAH BRANCH

Tel: 0148660959, 0148283256
E-mail: madinah@sffeco.com.sa

