



WATER

FIRE EXTINGUISHER
9 LTR.
WATER 21A
WH900S

CE 0086

1. PULL OUT SAFETY PIN
2. AIM THE JET TO FIRE BASE
3. SQUEEZE THE LEVER

CAUTION: DO NOT USE ON ELECTRICAL FIRE

Water

Extinguishers

Model	A	B	C	D	F
WH 600S	13 A				
WH 600J	13 A				
WH 900S	21 A				
WH 900J	13 A				



Product description

SFFECO water extinguishers are characterised by their high performance, simple method of operation ideal for tackling freely burning materials such as paper, cloth, wood and furniture. These are good general purpose fire extinguishers and widely used as they are useful and cost-effective.

Suitable for Class A fire risks

Note: Water extinguishers are not suitable for fires involving electrical risk.


Features:

- Water, a liquid agent only recommended for fighting class A Fire.
- Kite Mark certified to BS EN3
- High Quality Polyester Powder Coated Paint
- Thermoplastic internal coating to prevent corrosion
- Spray Nozzle to provide high fire rating
- Controlled discharge
- Brass Nickel plated head valve with simple squeeze operation
- Unique gauge testing system
- Unique colour code handle and base (Optional)
- Rechargeable & easy to service.

Ideal Use: Schools, Theaters, Apartments and Office, Dry goods store.

Caution:

Don't use on Electrical Fire.

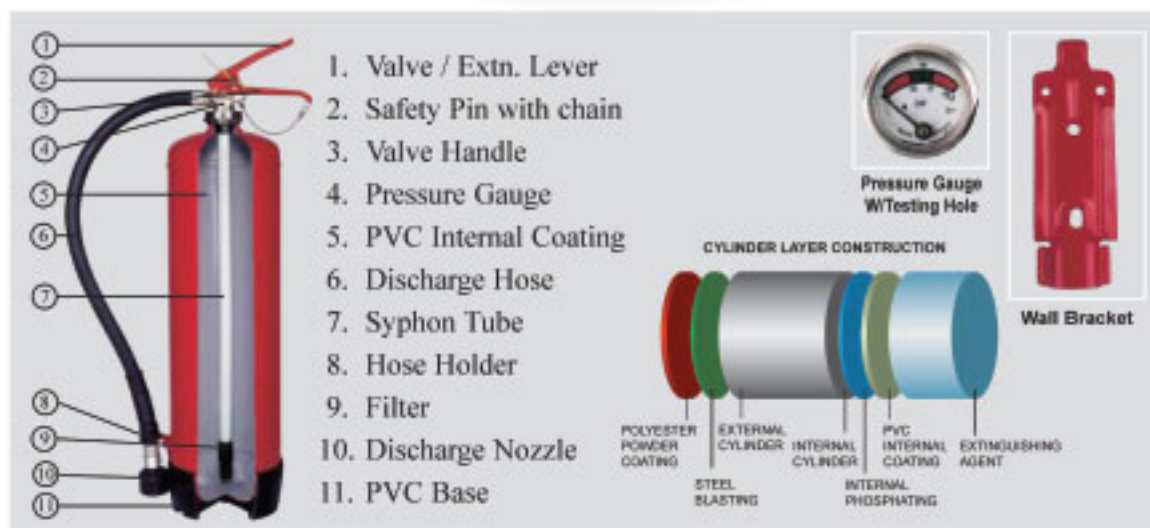

MODEL	WH600S	WH600J	WH900S	WH900J
Capacity	6 L	6 L	9 L	9 L
Fire Rating	13A	13A	21A	13A
Average Discharge Time	39 Sec	40 Sec.	50 Sec	60 Sec
Height	625 mm	625 mm	635 mm	635 mm
Diameter	150 mm	150 mm	185 mm	185 mm
Filled Weight	11.2 kg.	11.2 kg.	15.5 kg	15.5 kg.
Empty Weight	5.2 kg.	5.2 kg.	6.5 kg.	6.5 kg.
Operating Temperature	+5°C to +60°C	+5°C to +60°C	+5°C to +60°C	+5°C to +60°C
Working Pressure at 20°C	14 bar	14 bar	14 bar	14 bar
Maximum Service Pressure	15.8 bar	15.8 bar	15.8 bar	15.8 bar
Test Pressure	30 bar	30 bar	30 bar	30 bar

CE
0086

KM 668606

